System Reliability Simulation and Optimization by Component Reliability Allocation

Zissimos P. Mourelatos
Professor and Head
Mechanical Engineering Department
Oakland University
Rochester MI 48309

Report Documentation Page

Form Approved
OMB No. 0704-0188

1. REPORT DATE	2. REPORT TYPE	3. DATES COVERED
23 NOV 2011	**Briefing Charts**	**23-11-2011 to 23-11-2011**

4. TITLE AND SUBTITLE
SYSTEM RELIABILITY SIMULATION AND OPTIMIZATION BY COMPONENT RELIABILITY ALLOCATION

5a. CONTRACT NUMBER

5b. GRANT NUMBER

5c. PROGRAM ELEMENT NUMBER

6. AUTHOR(S)
Zissimos Mourelatos

5d. PROJECT NUMBER

5e. TASK NUMBER

5f. WORK UNIT NUMBER

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
Oakland University,Mechanical Engineering Department,Rochester,MI,48309

8. PERFORMING ORGANIZATION REPORT NUMBER
; #22117

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)
U.S. Army TARDEC, 6501 E.11 Mile Rd, Warren, MI, 48397-5000

10. SPONSOR/MONITOR'S ACRONYM(S)
TARDEC

11. SPONSOR/MONITOR'S REPORT NUMBER(S)
#22117

12. DISTRIBUTION/AVAILABILITY STATEMENT
Approved for public release; distribution unlimited

13. SUPPLEMENTARY NOTES
SimBRS Annual Review Meeting 2011

14. ABSTRACT
NA

15. SUBJECT TERMS

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			
unclassified	**unclassified**	**unclassified**	**Same as Report (SAR)**	**12**	

Standard Form 298 (Rev. 8-98)
Prescribed by ANSI Std Z39-18

Reliability Allocation and Cost Tradeoffs using Simulation

- Reliability allocation for a system is the process of assigning component reliabilities to achieve a system level reliability.
- Reliability comes at a cost.
- The objective of this study is to simulate an engineering system using:
  - Newer simulation methods
  - Developing better failure detection techniques
  - Perform multiobjective optimization
  - Allow for post-optimal tradeoffs

Four Joint Robot Example

- The system we use is a four-joint robot manipulator (Talon IV Engineer arm) consisting of four motors and eight sensors (two for each joint). One motor has redundancy so we have five motors effectively. Here is a kinematic diagram.

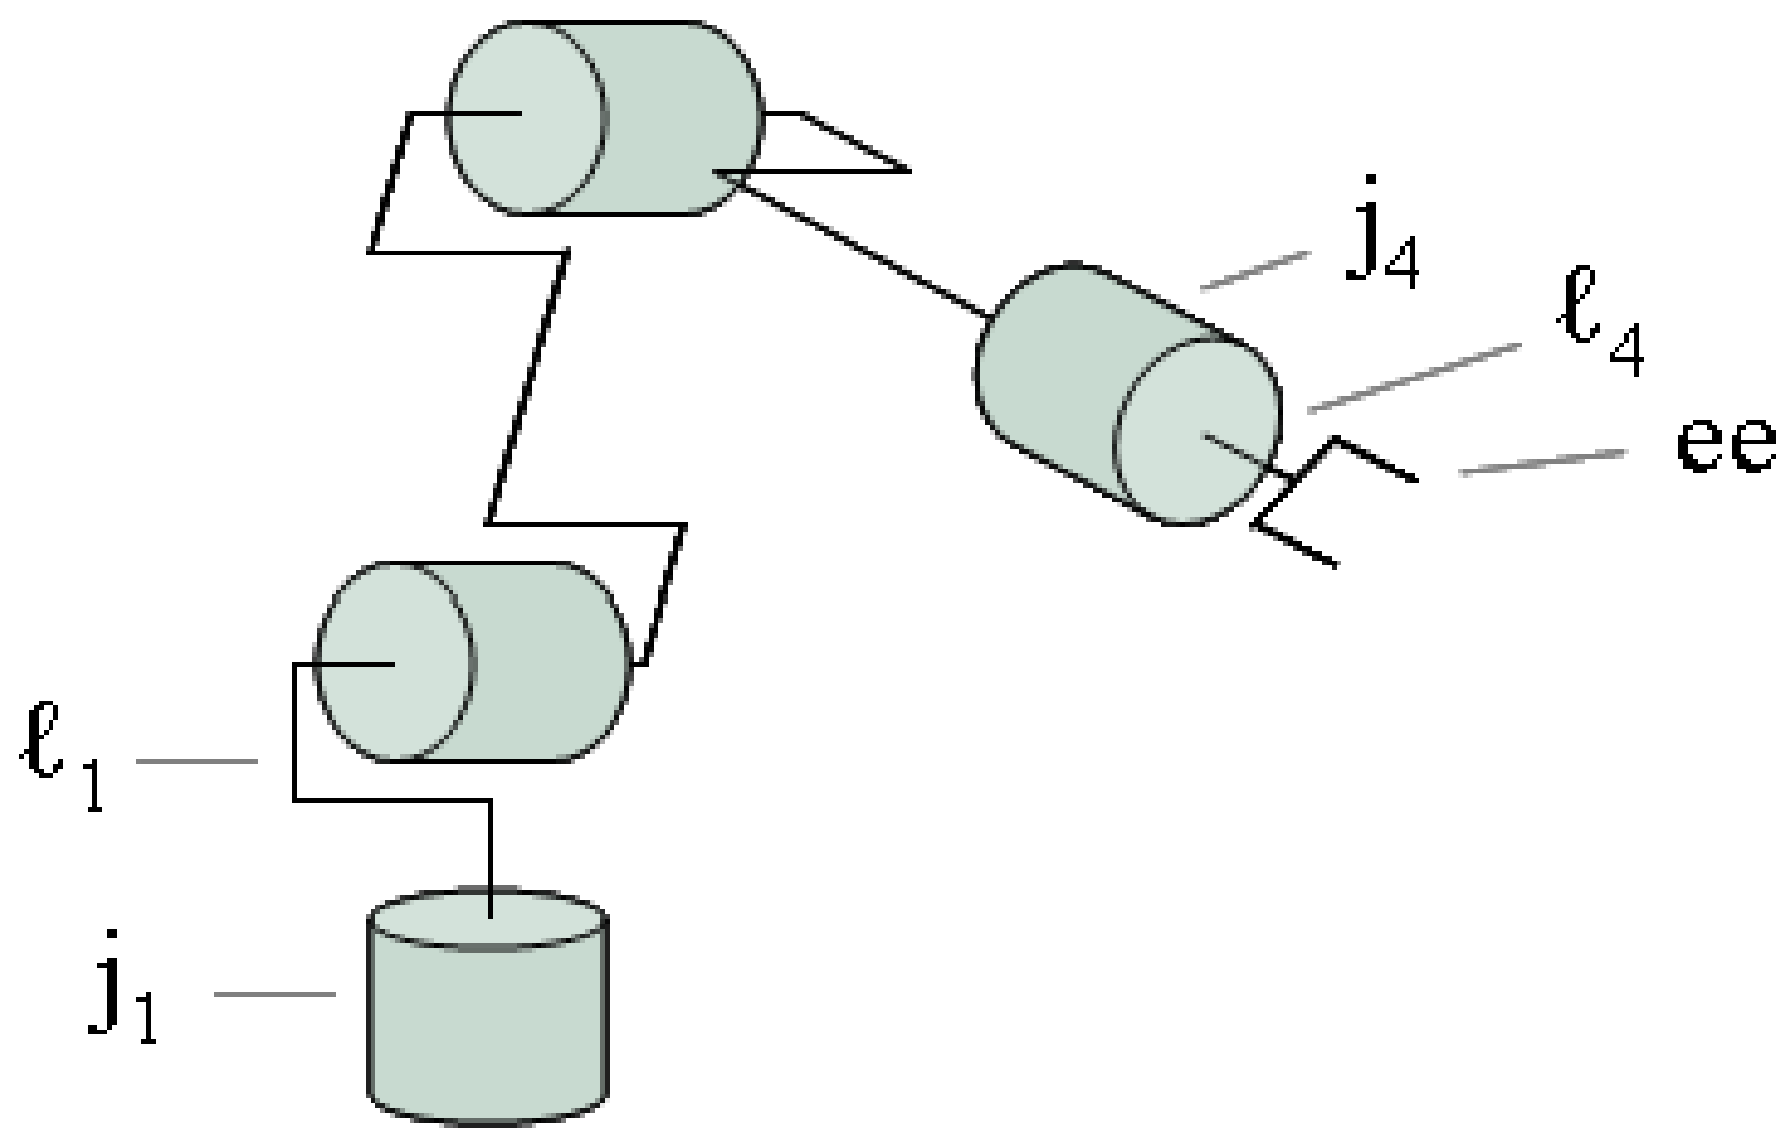

Four-Joint Robot Example - Fault Tree

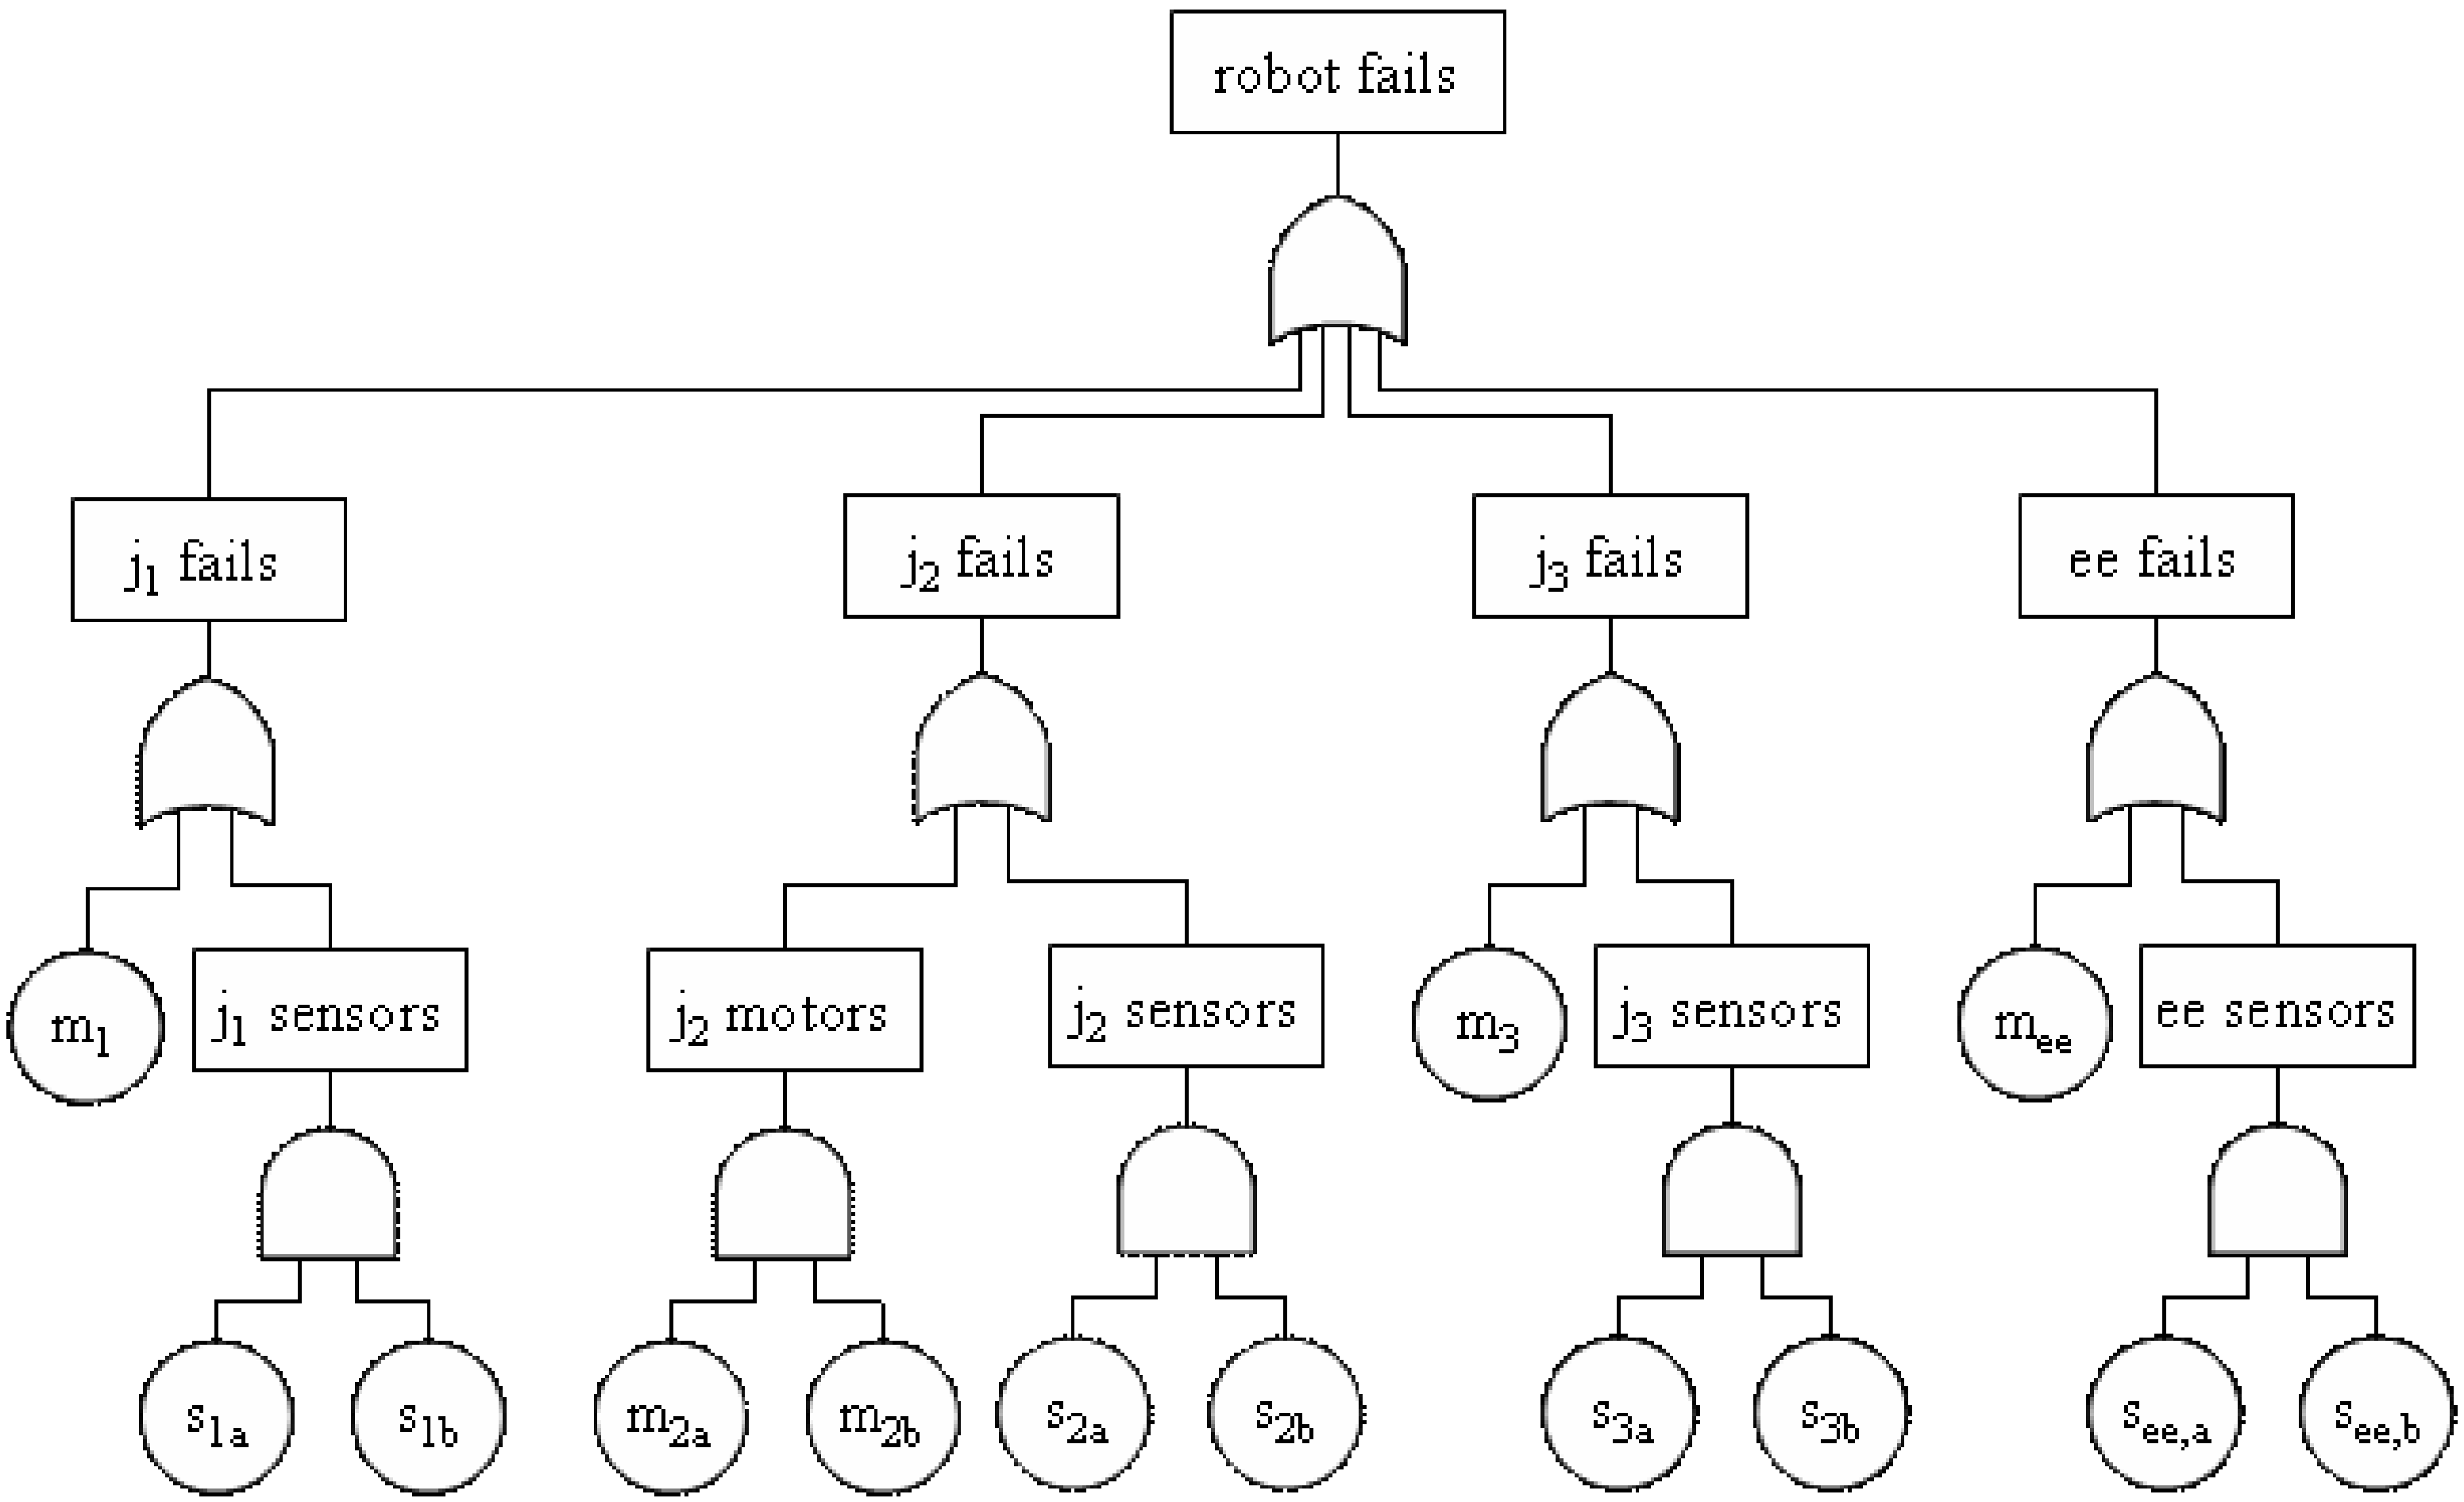

Adjacency matrix for the system

	SO	M1	S1A	S1B	M2A	M2B	S2A	S2B	M3	S3A	S3B	M4	S4A	S4B	SI
SO	0	**1**	0	0	0	0	0	0	0	0	0	0	0	0	0
M1	0	0	**1**	**1**	0	0	0	0	0	0	0	0	0	0	0
S1A	0	0	0	0	**1**	**1**	0	0	0	0	0	0	0	0	0
S1B	0	0	0	0	**1**	**1**	0	0	0	0	0	0	0	0	0
M2A	0	0	0	0	0	0	**1**	**1**	0	0	0	0	0	0	0
M2B	0	0	0	0	0	0	**1**	**1**	0	0	0	0	0	0	0
S2A	0	0	0	0	0	0	0	0	**1**	0	0	0	0	0	0
S2B	0	0	0	0	0	0	0	0	**1**	0	0	0	0	0	0
M3	0	0	0	0	0	0	0	0	0	**1**	**1**	0	0	0	0
S3A	0	0	0	0	0	0	0	0	0	0	0	**1**	0	0	0
S3B	0	0	0	0	0	0	0	0	0	0	0	**1**	0	0	0
M4	0	0	0	0	0	0	0	0	0	0	0	0	**1**	**1**	0
S4A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	**1**
S4B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	**1**
SI	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Determining failure of the system

- Packet travels upstream one step at a time. $\mathbf{v_o}$ is the vector that counts the copies of the packet at each component in the beginning

$$\mathbf{v}_1 = \mathbf{R}\mathbf{v}_0$$

- Where $\mathbf{v}_1$ counts the copies of the packet at each component after step 1. To see if will eventually reach C_{SO}, multiply $\mathbf{v}_0$ successively with **R**, at most n+1 times. Therefore after p steps $\mathbf{v}_p$ will be given by.

$$\mathbf{v}_p = \mathbf{R}^p \mathbf{v}_0$$

- Since we need to find if C_{SO} *ever* gets the packet, we need to sum all $\mathbf{v}_i$'s and see if the first element of the sum is non-zero. Let this sum be **s**:

$$\mathbf{s} = \sum_{i=1}^{n+1} \mathbf{R}^i \mathbf{v}_{i-1}$$

Determining failure of the system (contd.)

- In case some of the components fail, we can incorporate this into the adjacency matrix.

$$\mathbf{R}' = \mathbf{R} \times diag(\mathbf{c})$$

- The elements of the vector **c** are all one except those corresponding to components that have failed. These entries are zero. The sum becomes:

$$\mathbf{s} = \sum_{i=1}^{n+1} (\mathbf{R}')^{i} \mathbf{v}_{i-1}$$

- RHS is a geometric progression. We have,

$$\mathbf{s} = (\mathbf{I} - \mathbf{R}')^{-1} \mathbf{v}$$

Implementing the method

- We introduce a packet at C_{Si}, this can be represented by a column vector, all of whose elements are 0 except the last one which is 1:

$$\mathbf{v}_0 = \begin{bmatrix} 0 & 0 & 0 & 0 & \cdots & 1 \end{bmatrix}^T$$

- The sum **s**, is found using the expression shown before.
- The first element of **s**, corresponding to C_{SO} is an indicator of failure:
  - IF the first element is 0, the system has failed
  - IF the first element is 1, the system survives but has been rendered serial.
- The number can also be interpreted as the redundancy remaining in the system. For example, If the first element is 5, there are 5 paths remaining from C_{Si} to C_{SO}.

Parameters used for simulation

	Baseline MTTF (Hrs)	Baseline Cost ($)	COV	B-factor
Motor 1	31519	150	0.5	4
Sensor 1A	4845	50	0.5	4
Sensor 1B	4845	50	0.5	4
Motor 2A	3476.62	61.62	0.5	4
Motor 2B	3476.62	61.62	0.5	4
Sensor 2A	4845	50	0.5	4
Sensor 2B	4845	50	0.5	4
Motor 3	31519	150	0.5	4
Sensor 3A	4845	50	0.5	4
Sensor 3B	4845	50	0.5	4
Motor 4	31519	150	0.5	4
Sensor 4A	4845	50	0.5	4
Sensor 4B	4845	50	0.5	4

*Component and system times-to-failure are assumed to follow a Beta distribution because of its flexibility.

Reliability-Cost Pareto Front

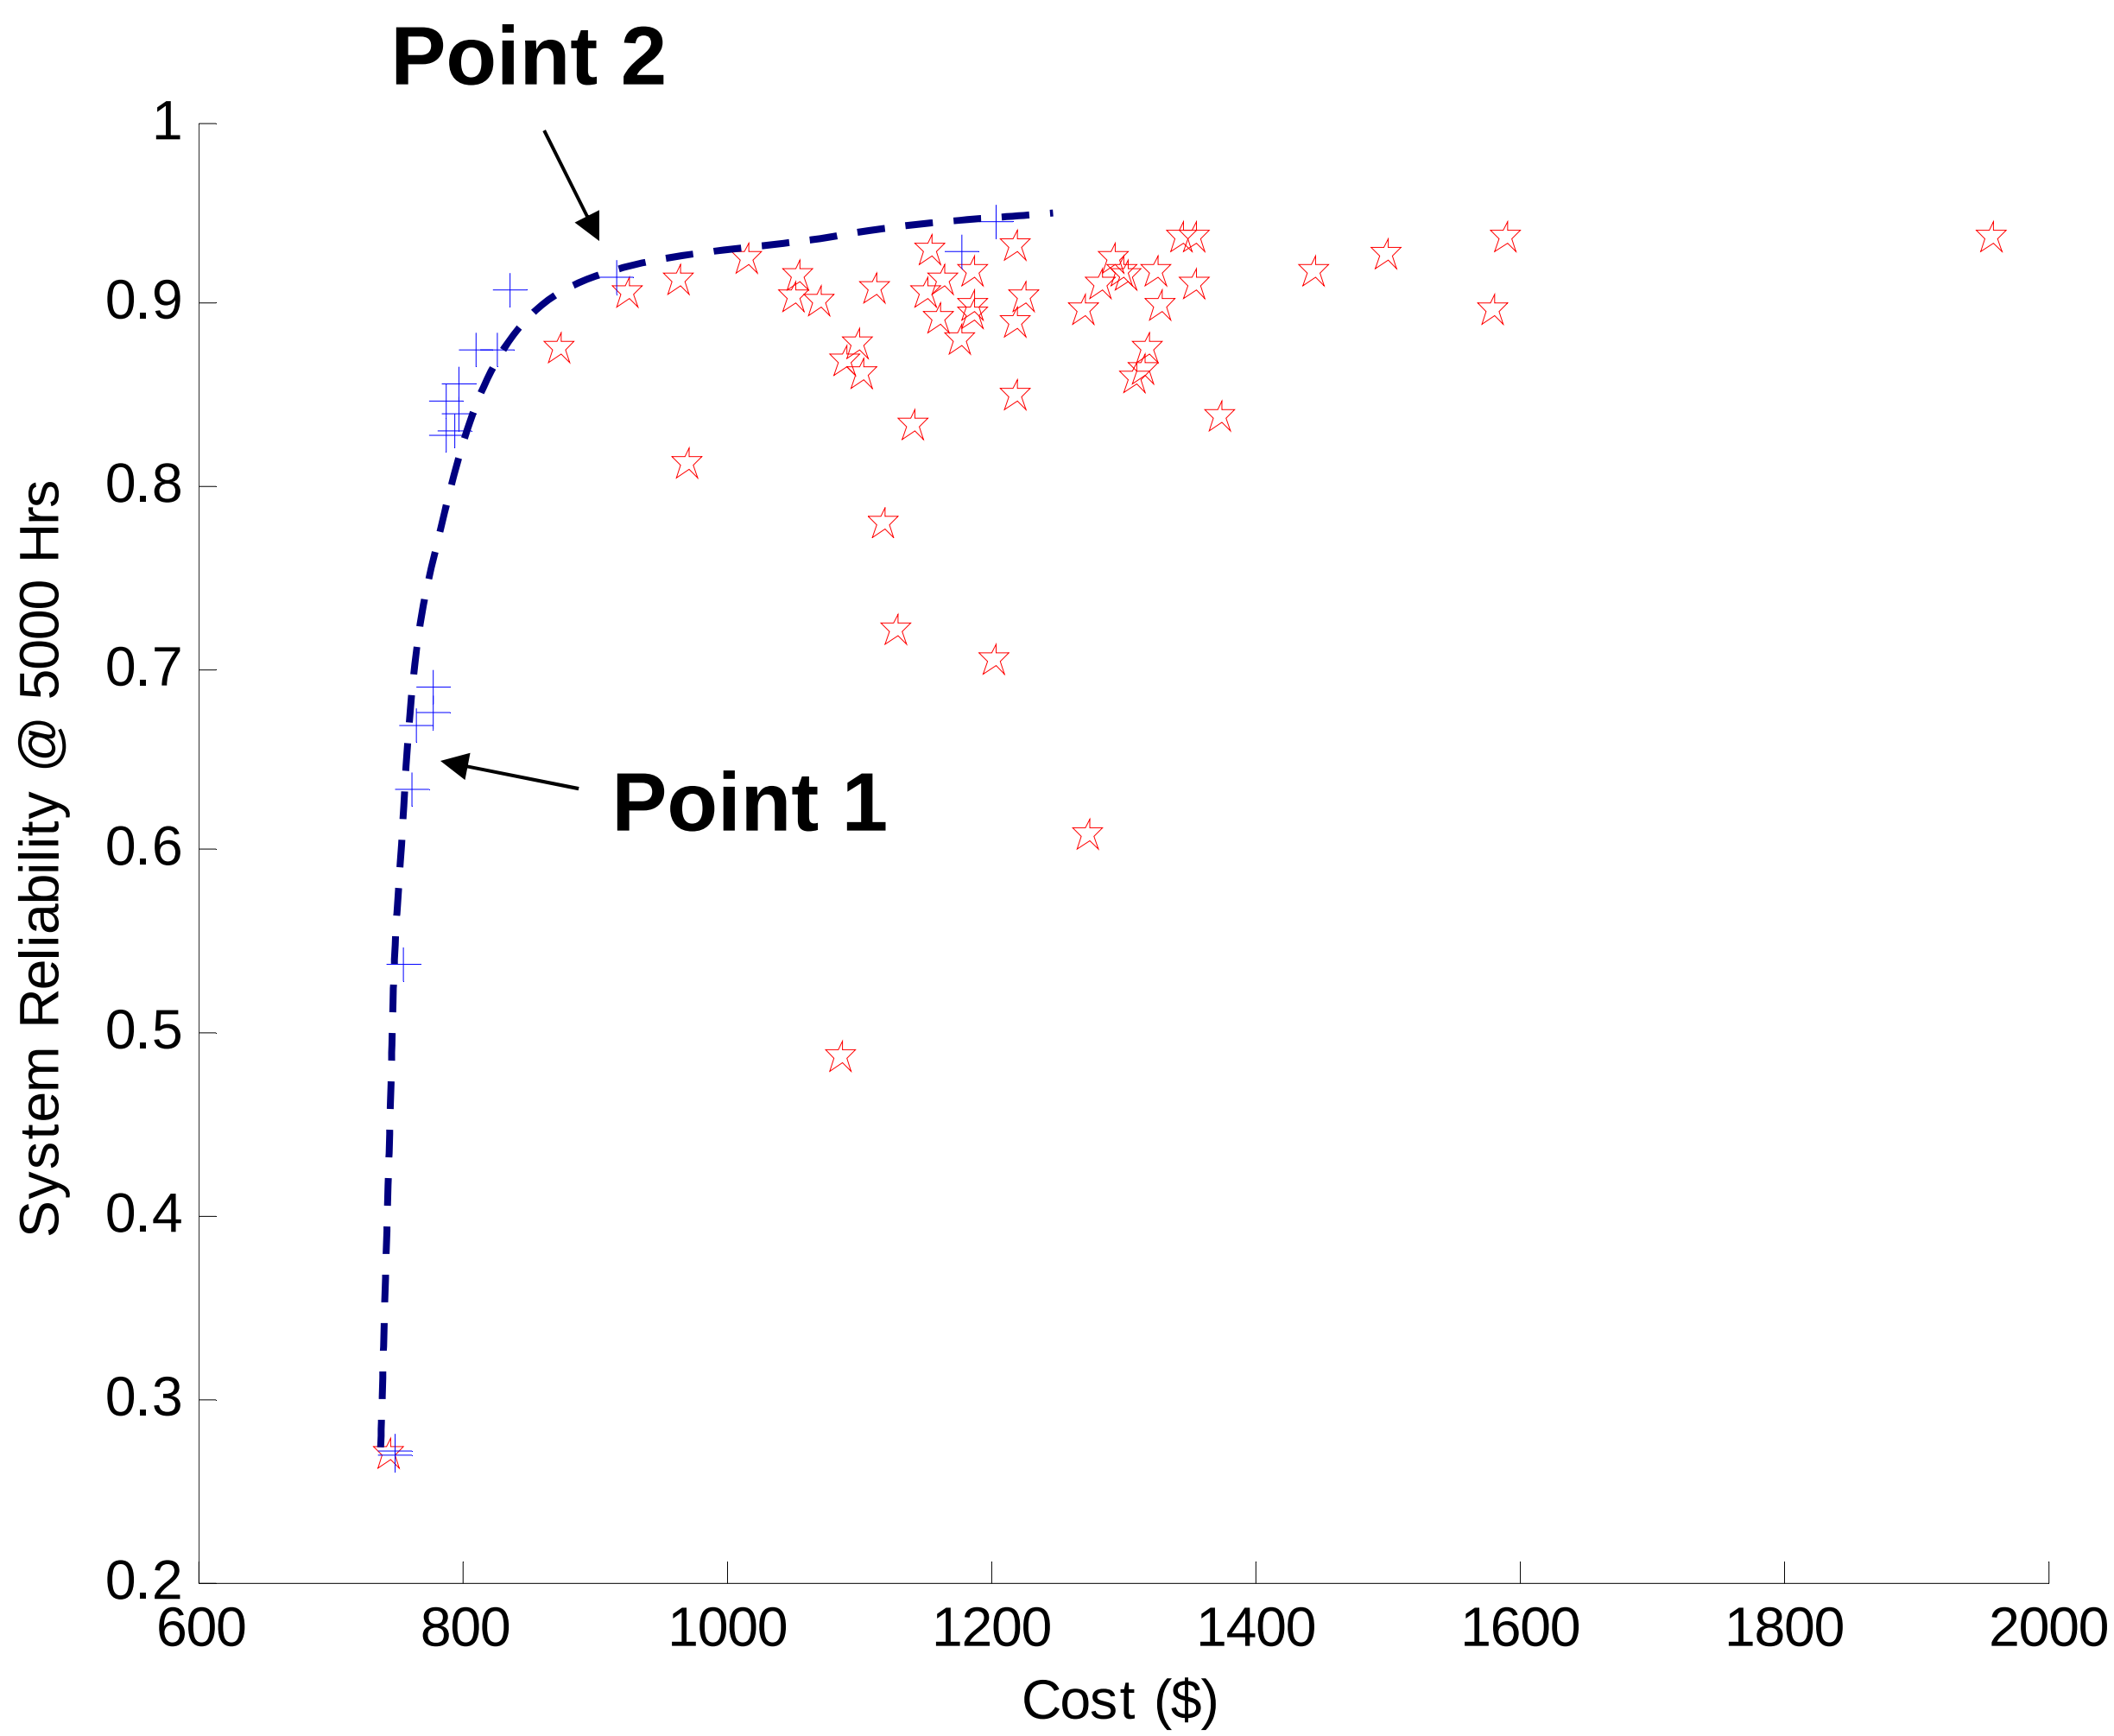

Designs Associated with Points 1 and 2 (Only shaded components are designed)

	MTTF (Hrs)	Cost ($)
Motor 1	**18625**	**99.6**
Sensor 1A	4845	50
Sensor 1B	4845	50
Motor 2A	**2011.3**	**40.4**
Motor 2B	**2873.4**	**51.8**
Sensor 2A	4845	50
Sensor 2B	4845	50
Motor 3	**16225.5**	**92.3**
Sensor 3A	4845	50
Sensor 3B	4845	50
Motor 4	**17531.3**	**96.2**
Sensor 4A	4845	50
Sensor 4B	4845	50
COST		**$780.30**
RELIABILITY		**0.6713**

	MTTF (Hrs)	Cost ($)
Motor 1	**25951.9**	**125.7**
Sensor 1A	4845	50
Sensor 1B	4845	50
Motor 2A	**4143.1**	**74.6**
Motor 2B	**6203.5**	**135**
Sensor 2A	4845	50
Sensor 2B	4845	50
Motor 3	**16128.9**	**92.1**
Sensor 3A	4845	50
Sensor 3B	4845	50
Motor 4	**15759.5**	**91**
Sensor 4A	4845	50
Sensor 4B	4845	50
COST		**$918.40**
RELIABILITY		**0.9125**

Conclusions

- Demonstrated simulation of reliability of a four joint robot
- Developed method for failure identification using partial system failures
- Performed multiobjective optimization using state of the art, NSGA-II which gave a Pareto front
- Future work
  - How to determine the knee region (best reliability with minimal increase in cost) ?
    - Should use a utility function - it will automatically take into account tradeoffs